

# B33

EMERGENCY LIGHTING EQUIPMENT

# PHILIPS bodine

A Division Of Philips Electronics North America Corporation

**Specification-grade, three-lamp parallel emergency illumination; 3400 lumens with three 32 W (4') T8 lamps**

## Product Summary

### UL LISTED

Factory or Field Installation

### Illumination Time

90 Minutes

### Initial Light Output

2700 - 3400 Lumens

### Full Warranty

5 Years (NOT pro-rata)

### Dual Input Voltage

120/277 VAC, 60 Hz

### AC Input Current

280 mA

### AC Input Power Rating

8.0 Watts

### Test Switch

Single Pole

### Battery

Field-Replaceable, High-Temperature, Maintenance-Free Nickel-Cadmium Battery  
7- to 10-Year Life Expectancy

### Battery Charging Current

280 mA

### Recharge Time

24 Hours

### Charging Indicator Light

LED

### Temperature Rating (Ambient)


+5°C to +50°C  
(41°F to 122°F)

### Dimensions

16.3" x 5.5" x 1.7"  
(414 mm x 138 mm x 44 mm)  
2' (610 mm) Flexible Conduit  
Mounting Center 15.7" (400 mm)

### Weight

8.7 lbs. (3.9 kg)

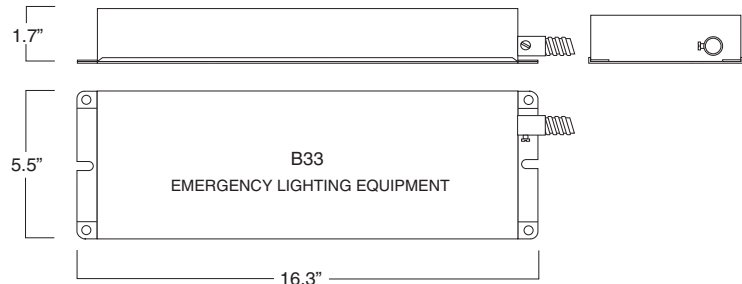

## APPLICATION

The B33 emergency lighting equipment works in conjunction with an INSTANT START, PARALLEL AC ballast to convert new or existing fluorescent fixtures into emergency lighting. The emergency lighting equipment consists of a field-replaceable nickel-cadmium battery, charger and electronic circuitry in one red case. The B33 can be used with two or three 32 W (4') T8 fluorescent lamps or with two or three 39 W or two 40 - 55 W (4-pin) long compact fluorescent lamps without integral starters. It is compatible ONLY with instant start, parallel two-, three- or four-lamp electronic or standard AC ballasts. If used in an emergency-only fixture, no AC ballast is necessary. The B33 is suitable for indoor and damp locations. It is not suitable for air handling heated air outlets or wet or hazardous locations. For information about specific lamp and ballast compatibility, please call the factory. Recommended applications include: hospital surgical suites, areas along the path of egress with high ceiling heights and health care, educational, commercial and institutional facilities needing higher levels of emergency illumination.

## OPERATION

When AC power fails, the B33 immediately switches to the emergency mode, operating either two or three lamps for a minimum of 90 minutes. When AC power is restored, the B33 automatically returns to the charging mode.

## WARRANTY

Model B33 is warranted for five (5) full years from date of purchase. This warranty covers only properly installed Philips Bodine emergency lighting equipment used under normal conditions. For the warranty period, Philips Emergency Lighting will, at its option, repair or replace without charge a defective emergency lighting equipment, provided it is returned to the factory transportation prepaid and our inspection determines it to be defective under terms of the warranty. Repair or replacement, as stated above, shall constitute the purchaser's exclusive warranty, which does not extend to transportation, installation, labor or any other charges; nor does it apply to any equipment of another manufacturer used in conjunction with the emergency ballast.

## UL and CODE COMPLIANCE

The B33 has been tested by Underwriters Laboratories in accordance with the standards set forth in UL 924, "Emergency Lighting and Power Equipment," and is UL Listed for factory or field installation. Emergency illumination time exceeds the National Electrical Code (NEC), Life Safety Code (NFPA-LSC) and UL 90-minute requirements.


*Emergency ballasts can be modified to accommodate special voltages, frequencies and longer run times.*

## Specifiers Reference

Project \_\_\_\_\_ Type \_\_\_\_\_ Model No. \_\_\_\_\_  
Comments \_\_\_\_\_

L2000017

03/18/11 © Philips Emergency Lighting  
P.O. Box 460 Collierville, TN USA 38027-0460  
Sales 800-223-5728 FAX 901-853-5009  
Tech. Support 888-263-4638  
[www.philips.com/bodine](http://www.philips.com/bodine)




# B33

## EMERGENCY LIGHTING EQUIPMENT

**Specification-grade, three-lamp parallel emergency illumination; 3400 lumens with three 32 W (4') T8 lamps**

### INSTALLATION

The B33 does not affect normal fixture operation and may be used with either a switched or unswitched fixture. If a switched fixture is used, an unswitched hot lead must be connected to the emergency lighting equipment. The emergency lighting equipment must be fed from the same branch circuit as the AC ballast. The B33 may be installed on top of or remote from the fixture. The emergency lighting equipment may be remotely installed up to half the distance the AC ballast manufacturer recommends remoting the AC ballast from the lamp or up to 50 feet, whichever is less. Installation is not recommended with fixtures where the ambient temperature may fall below +5°C. A charging indicator light and single-pole test switch are provided. Upon request, a single-pole test switch/monitor plate is provided for remote installation of the test switch and charging indicator. (fits single-gang box)



*A Test/Monitor Plate with separate test switch and charging indicator light is provided. Upon request, a Test/Monitor Plate with a single illuminated test switch is provided.*

### EMERGENCY ILLUMINATION

The B33 has been optimized for three-lamp operation. The B33 produces 3250 to 3400 lumens initial emergency light output with three 32 W (4') T8 lamps. Total light output is evenly divided among the lamps for better distribution of emergency illumination.

### SPECIFICATION

Emergency lighting shall be provided by using a standard fluorescent fixture equipped with a Philips Bodine B33 emergency lighting equipment. This emergency lighting equipment shall consist of a field-replaceable, high-temperature, maintenance-free nickel-cadmium battery, charger and electronic circuitry contained in one 16 5/16" x 5 7/16" x 1 3/4" red metal case with a 2' length of flexible conduit. A solid-state charging indicator light to monitor the charger and battery, a single-pole test switch and installation hardware shall be provided. The emergency lighting equipment shall be capable of operating (two or three) fluorescent lamps at \_\_\_\_\_ lumens (see Table 1) initial light output in the emergency mode for a minimum of 90 minutes. It shall be suitable for indoor locations. The B33 shall have 8 Watts maximum of input power and a 57.6 Watt-hour battery capacity and shall exceed emergency standards set forth by the current NEC. The emergency lighting equipment shall be UL Listed for installation on top of or remote from the fixture and shall be warranted for a full five years from date of purchase.

Table 1 - Initial Lumen Output

LAMP	LUMENS	
	3 Lamp	2 Lamps
FO32, T8/841	3400	3000
FO32, T8/741	3250	2750
PL-L 36W, F39/36BX, DULUX L 36W	3200	2700
PL-L 40W, F40/30BX, DULUX L 40W		2700
PL-L 50W, F50BX, DULUX L 55W		3500

*Partial listing of lamps operated.*

L2000017

03/18/11 © Philips Emergency Lighting  
 P.O. Box 460 Collierville, TN USA 38027-0460  
 Sales 800-223-5728 FAX 901-853-5009  
 Tech. Support 888-263-4638  
 www.philips.com/bodine

*For the most current technical information and notices, please visit TechNotes on our website.*