



Emergency Ballasts

Compact Fluorescent

B84CG



Project: _____
Type: _____
Model No: _____ Qty: _____
Date: _____
Notes: _____

Specification Grade Suitable for Low-Mercury (Green Lamps) Up to 1250 Lumens Output

Product order number: B84CGREDM (metal case)

Specifications

UL LISTED

Factory or Field Installation
(Indoor and Damp)

Illumination Time

90 Minutes

Initial Light Output

Up to 1250

Full Warranty

2 Years (NOT pro-rata)

Input Voltage

120/277 VAC, 60 Hz

AC Input Current

290 mA

AC Input Power Rating

3.5 Watts

Test Switch

Single Pole

Battery

High-Temperature, Maintenance-Free
Nickel-Cadmium Battery
7- to 10-Year Life Expectancy

Battery Charging Current

280 mA

Recharge Time

24 Hours

Charging Indicator Light

LED

Temperature Rating (Ambient)

0°C to +50°C (32°F to 122°F)

Dimensions

12.0" x 2.4" x 1.5"
(305 mm x 60 mm x 38 mm)
2' (610 mm) Flex Conduit Each End
Mounting Center 11.5" (292 mm)

Weight





4.3 lbs. (1.95 kg)

Benefits:

- Compatible with low-mercury lamps
- Emergency mode lumen output up to 1250 lumens
- End-of-Lamp-Life Compatible

Dimensions

12.0" x 2.4" x 1.5" (mounting center - 11.5")

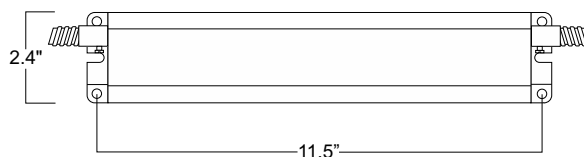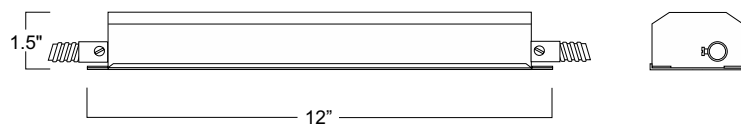

A test switch and charging indicator light is provided.



B84CG

Flourescent Emergency Ballast, Specification Grade

Table 1 Initial Lumen Output

LAMP (4-PIN)	LUMENS
	1 Lamp
PL-T 42 W	1250
PL-T 32 W	1250
PL-T 26 W/4P, F26DBX, Dulux T/E 26 W	700
PL-T 18 W/4P, F18DBX, Dulux T/E 18 W	900
PL-T 13 W/4P, F13DBX, Dulux T/E 13 W	700
PL-L 36 W, PHILIPS	1100
F39/3BX, Dulux L 36 W	1250
PL-L 24 W, F27/24BX, Dulux L 27 W	800
PL-L 18 W, F18BX Dulux L 18 W	775
FC9T5, FPC22	700
FC12T5, FC12T5/HO, FPC40	1000

APPLICATION

The B84CG emergency ballast works in conjunction with an AC ballast to convert new or existing fluorescent fixtures into emergency lighting. The emergency ballast consists of a high-temperature nickel-cadmium battery, charger and electronic circuitry in one compact red case. The B84CG can be used with one 13 - 42 W twin, quad or triple twin-tube lamp, one 22 - 40 W T5 circline or one 18 - 39 W long compact fluorescent lamp, including low mercury and amalgam lamps. It is also compatible with most electronic, magnetic and dimming single- and multi-lamp ballasts. The B84CG is suitable for indoor and damp locations. It is not suitable for air handling heated air outlets or wet or hazardous locations. For information about specific lamp and ballast compatibility, please call the factory.

OPERATION

When AC power fails, the B84CG immediately switches to the emergency mode, operating one lamp at a reduced lumen output for a minimum of 90 minutes. When AC power is restored, the emergency ballast automatically returns to the charging mode and, using a patented circuit, delays AC ballast operation for approximately three seconds to prevent false tripping of the AC ballast end-of-lamp-life shutdown circuits.

INSTALLATION

The B84CG does not affect normal fixture operation. It may be used with either a switched or unswitched fixture. If a switched fixture is used, an unswitched hot lead must be connected to the emergency ballast. The emergency ballast must be fed from the same branch circuit as the AC ballast. The B84CG may be installed on top of or remote from the fixture. The B84CG may be remotely installed up to half the distance the AC ballast manufacturer recommends removing the AC ballast from the lamp or up to 6 feet, whichever is less. Installation is not recommended with fixtures where the ambient temperature may fall below 0°C.

EMERGENCY ILLUMINATION

Depending on the wattage and type of lamp selected, the B84CG produces up to 1250 lumens initial emergency light output (see Table 1). During emergency operation, one lamp is illuminated, even if installed with a multi-lamp AC ballast.

SPECIFICATION

Emergency lighting shall be provided by using a standard fluorescent fixture equipped with a Philips Bodine B84CG emergency ballast. This emergency ballast shall consist of a high-temperature,

maintenance-free nickel-cadmium battery, charger and electronic circuitry contained in one 12" x 2 3/8" x 1 1/2" red metal case with 2' of flexible conduit at each end. A test/monitor plate with a solid-state charging indicator light to monitor the charger and battery, a single-pole test switch and installation hardware shall be provided. The emergency ballast, using a patented circuit, shall delay AC ballast operation for approximately Three seconds to prevent flase tripping of AC ballast end-of-lamp-life shutdown circuits. The emergency ballast shall be capable of operating one _____ standard or low mercury fluorescent lamp at _____ lumens (see Table 1) initial light output in the emergency mode for a minimum of 90 minutes. It shall be suitable for indoor and damp locations. The B84CG shall have 3.5 Watts of input power and a 19.2 Watt-hour battery capacity and shall comply with emergency standards set forth by the current NEC. The emergency ballast shall be UL Listed for installation on top of or remote from the fixture.

WARRANTY

Model B84CG is warranted for two (2) full years from date of purchase. Please see detailed warranty information on our web site.

© 2016 Philips Lighting Holding B.V. All rights reserved. Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.



Philips Emergency Lighting
236 Mt. Pleasant Rd.
Collierville, TN 38017
Tech Support: 888.263.4638
Sales: 800.223.5728

Document order number: L2000035 16.05

philips.com/bodine