

**PHILIPS**  
**bodine**

Emergency Drivers

LED

BSL310HAZSB



Project: \_\_\_\_\_  
Type: \_\_\_\_\_  
Model No: \_\_\_\_\_ Qty: \_\_\_\_\_  
Date: \_\_\_\_\_  
Notes: \_\_\_\_\_

## Hazardous Locations Emergency Driver For LED Strips Class 2 output

Product order number: BSL310HAZSB

### Specifications

#### UL Recognized for US and Canada

Listed to UL924 and tested to CSA 22.2, No. 141  
For Factory Installation Only  
(Indoor and Damp)

#### Illumination Time

90 Minutes

#### Full Warranty

5 Years (NOT pro-rata)

#### Universal Input Voltage

120-277 VAC, 50/60 Hz

#### AC Input Power Rating

4.0 W (Maximum)

#### Output Voltage

15-50 VDC

#### Output Power

10.4 W (Maximum)

#### Test Switch/Charging Indicator Light

Illuminated Test Switch

#### Battery

High-Temperature, Maintenance-Free  
Nickel-Cadmium Battery  
7- to 10-Year Life Expectancy

#### Recharge Time

24 Hours

#### Temperature Rating (Ambient)

0°C to +55°C (32°F to 131°F)

#### Dimensions

Electronics - 6.2" x 2.2" x 1.2"  
Battery - 9.0" x 2.2" x 1.2"

#### Weight



3.6 lbs. (1.63kg)

### Benefits:


- Smart Charger Technology for low energy consumption
- Meets CEC Title 20 (California Energy Commission) efficiency standards
- Class 2 output - UL 1310 Certified, CSA 22.2 No 223-M91 compliant
- Emergency mode lumen output of up to 1300 lumens
- Universal input (120-277 VAC)
- 2 wire input reduces wiring errors
- Compatible with a variety of LED strip manufacturers
- Compatible with AC drivers and LED loads rated for Class 2
- RoHS Compliant
- Approved for use in Class I Division 2 hazardous location luminaires.

### Dimensions

Electronics - 6.2" x 2.2" x 1.2"

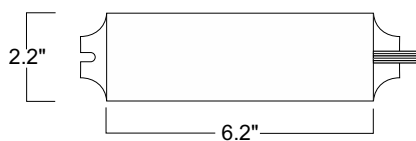

Battery - 9.0" x 2.2" x 1.2"

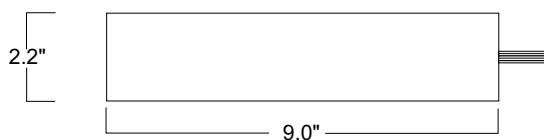

# BSL310HAZSB

## Emergency LED Driver for Linear LED Strips, Hazardous Locations, Class 2 Output

### Application

The BSL310HAZSB universal input (120-277 V) emergency LED driver works in conjunction with an AC LED driver that has an output current not to exceed 3.0 A. The emergency driver consists of a high-temperature nickel-cadmium battery, charger and electronic circuitry in one case. The BSL310HAZSB can deliver up to 10.4 watts to an LED load (measured at nominal battery voltage) for 90 minutes. If used in an emergency-only fixture, no AC driver is necessary. The BSL310HAZSB is **UL Component Recognized for factory installation only** and is suitable for use in Class I, Division 2 type fixtures. It is suitable for indoor and damp locations and for sealed & gasketed fixtures, including fixtures rated for wet locations. These fixtures should be tested by the fixture manufacturer in accordance to the standards pertaining to Class I, Division 2 applications. For more information about specific LED and AC driver compatibility, please call the factory.

### Operation

When AC power fails, the BSL310HAZSB immediately switches to the emergency mode, operating the LEDs at a reduced lumen output for a minimum of 90 minutes. When AC power is restored, the emergency driver automatically returns to the charging mode.

### Installation

The BSL310HAZSB does not affect normal fixture operation and may be used with either a switched or unswitched fixture. If a switched fixture is used, an unswitched hot lead must be connected to the emergency driver. The emergency driver must be fed from the same branch circuit as the AC driver. Installation is not recommended with fixtures where the ambient temperature may fall below 0° C. The product is suitable for installation in sealed and gasketed fixtures.

### Emergency Illumination

The BSL310HAZSB operates an LED load of up to 10.4 W at nominal battery voltage for a minimum of 90 minutes.


### Specification

Emergency lighting shall be provided by using a LED fixture equipped with a Philips Bodine BSL310HAZSB universal input (120-277 V) emergency driver. This emergency driver shall consist of a high-temperature, maintenance-free nickel-cadmium battery, charger and electronic circuitry contained in one case. An illuminated test switch (ITS) to monitor charger and battery and installation hardware shall be provided. The emergency driver shall be capable of delivering up to

10.4 watts to an LED load for a minimum of 90 minutes. The BSL310HAZSB is suitable for indoor and damp locations and for sealed & gasketed fixtures. It shall be suitable for use in Class I, Division II type fixtures. The BSL310HAZSB shall have a maximum of 4.0 watts of input power and a 24.0 Watt-hour battery capacity and shall comply with emergency standards set forth by the current NEC. This device complies with Part 15 of the FCC Rules and meets CEC Title 20 (California Energy Commission) efficiency standards. The emergency driver shall be UL Recognized for factory installation only.

### Warranty

The BSL310HAZSB is warranted for five (5) full years from date of manufacture (NOT pro-rata). Please see detailed warranty information on our web site.



*BSL310HAZSB ships with an IP67 2-wire illuminated test switch/charging indicator light.*

© 2019 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.



Philips Emergency Lighting  
236 Mt. Pleasant Rd.  
Collierville, TN 38017  
Tech Support: 888.263.4638  
Sales: 800.223.5728

[philips.com/bodine](http://philips.com/bodine)