

Up to 1.7 W emergency illumination with LEDs

Product Summary

CE, ENEC



Illumination Time
3 hours

Full Warranty
5 Years (NOT pro-rata)

Input Voltage
220-240 VAC, 50 Hz

AC Input Current
22 mA (nominal)

AC Input Power Rating
4.0 W (maximum)

Output Current
30 mA (constant)

Output Power
1.7 W (maximum)

Status Indicator
Bi-colour indicator LED

Battery (External)
High-Temperature,
Maintenance-Free
Nickel-Cadmium Battery
7- to 10-Year Life Expectancy


Battery Charging Current
160 mA

Recharge Time
24 Hours

Temperature Rating (Ambient)
0°C to +50°C
(32°F to 122°F)

Dimensions (Excluding Battery)
6.50" x 2.10" x 1.20"
(165 mm x 54 mm x 31 mm)

Emergency Ballast Lumen Factor
Fortimo LED driver 1100-2000/l
LuxSpace Compact BBS 490 DLM
EBLF 10%

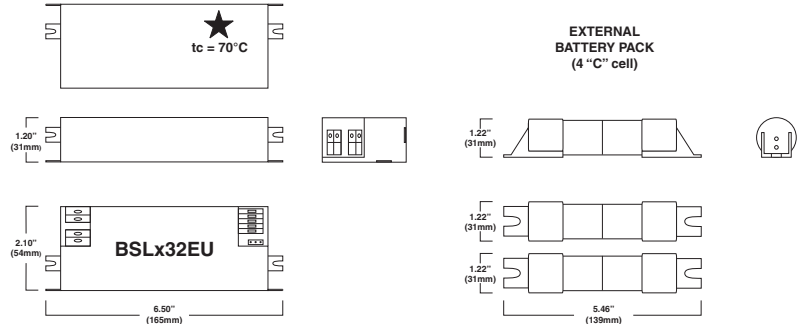

Application

The BSLx32EU emergency LED driver works in conjunction with an AC LED driver to convert new or existing LED fixtures into emergency lighting. The BSLx32EU can be used with an LED lighting load of up to 1.7 Watts at a constant rated current of 30 mA for 3 hours. If used in an emergency-only fixture, no AC driver is necessary.

Operation

When AC power fails, the BSLx32EU immediately switches to the emergency mode, operating the LEDs at a reduced lumen output for a minimum of 3 hours. When AC power is restored, the emergency driver automatically returns to the charging mode. During automated self-testing, the BSLx32EU simulates an AC power failure, causing the emergency LED driver to switch to emergency mode and conduct a discharge to monitor battery voltage and discharge current. The operational status of the unit is indicated by a bi-colour LED.

Installation

The BSLx32EU does not affect normal fixture operation and may be used with either a switched or unswitched fixture. If a switched fixture is used, an unswitched hot lead must be connected to the emergency driver. The emergency driver must be fed from the same branch circuit as the AC driver. During installation, when the battery is connected for the first time the emergency driver enters rest mode. During this mode, the emergency driver's output is disabled. Connection to the mains is required to exit the rest mode.

Testing

Commissioning Test: After installation of the emergency driver and initial connection to the mains supply, the emergency driver will commence charging the batteries for 24 hours (initial charge). Upon completion of this initial charge the emergency driver will conduct a 3 hour commissioning test.

Functional test: Functional tests are carried out for 5 seconds on a weekly basis under control of the micro controller.

Duration test: A 3 hour full duration test is carried out yearly to check the capacity of the batteries.

Specifiers Reference

Project _____ Type _____ Model No. _____
Comments _____

L2300007

05/06/11 © Philips Emergency Lighting
P.O. Box 460 Collierville, TN USA 38027-0460
Tech. Support +1 901-861-4605
www.philips.com/bodine

Up to 1.7 W emergency illumination with LEDs

Emergency Illumination

The BSLx32EU operates an LED load of up to 1.7 W at a constant rated current of 30 mA for a minimum of 3 hours.

Specification


Emergency lighting shall be provided by using a LED fixture equipped with a Philips Bodine BSLx-32EU emergency driver. A LED to monitor charger and battery and installation hardware shall be provided. The emergency driver shall be capable of operating an LED load of up to 1.7 Watts at a constant rated current of 30 mA for a minimum of 3 hours. The BSLx32EU shall have less than 4.0 watts input power and a 12 Watt-hour battery capacity and shall comply with emergency standards set forth by the current IEC. The emergency driver shall be warranted for a full five years from date of purchase.

Warranty

Model BSLx32EU is warranted for five (5) full years from date of purchase. This warranty covers only properly installed Philips Bodine emergency LED drivers used under normal conditions. For the warranty period, Philips Emergency Lighting will, at its option, repair or replace without charge a defective emergency LED driver, provided it is returned to the factory transportation prepaid and our inspection determines it to be defective under terms of the warranty. Repair or replacement, as stated above, shall constitute the purchaser's exclusive warranty, which does not extend to transportation, installation, labor or any other charges; nor does it apply to any equipment of another manufacturer used in conjunction with the emergency driver.

Status indication

LED	System Status
Permanent Green	Charging mode. System OK
Fast flashing green (0.2 sec interval)	Functional or Factory test Underway
Slow flashing green (0.5 sec interval)	Duration test or Commissioning test underway
Permanent Red	Lamp Fault or No Load/Lamp
Fast flashing Red (0.2 sec interval)	Charging fault (Charge Current Fault)
Slow flashing Red (0.5 sec interval)	Battery failure during test modes and charging mode.
Slow flashing green (1 sec interval)	Rest mode

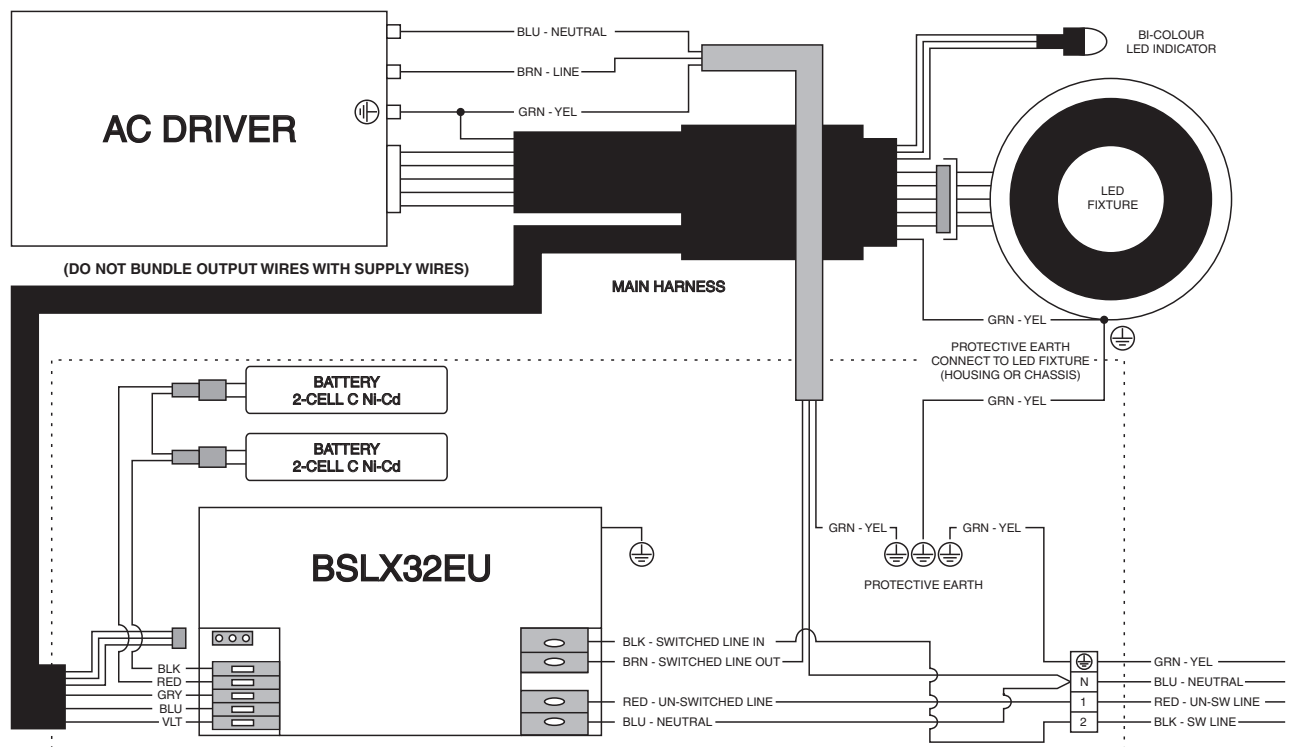

L2300007

05/06/11 © Philips Emergency Lighting
 P.O. Box 460 Collierville, TN USA 38027-0460
 Tech. Support +1 901-861-4605
www.philips.com/bodine

For the most current technical information and notices, please visit TechNotes on our website.